
(19) World Intellectual Property Organization International Bureau

(43) International Publication Date 18 December 2003 (18.12.2003)

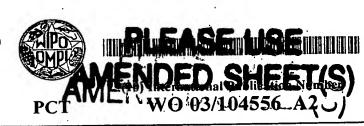

(51) International Patent Classification7:

D21H

(21) International Application Number: PCT/CH03/00366

(22) International Filing Date: 6 June 2003 (06.06.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

969/02

6 June 2002 (06.06.2002) CH

(71) Applicant and

(72) Inventor: MILLER, Balthasar [CH/CH]; Heideggweg 6, CH-5000 Aarau (CH).

(74) Agents: HASLER, Erich et al.; Riederer Hasler & Partner Patentanwälte AG, Elestastrasse 8, CH-7310 Bad Ragaz (CH).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

 without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS TO MANUFACTURE AN ION-PERMEABLE AND ELECTRICALLY CONDUCTING FLAT MATERIAL, THE MATERIAL OBTAINED ACCORDING TO THE PROCESS, AND FUEL CELLS

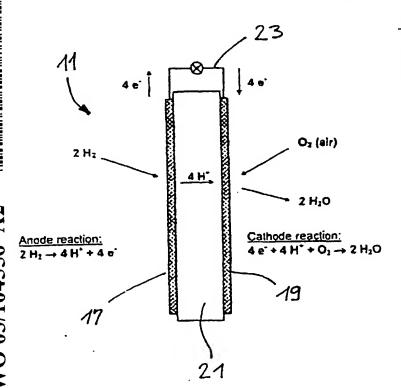

(57) Abstract: A fibrous, flat and ion-permeable material made of synthetic fibers, in particular of synthetically spun fibers such as acrylic fibers or aramid fibers, is processed into staple fibers of a specific length and then fibrillated. In a wet-laid inclined machine (paper machine), the fibrillated fibers are formed into a continuous web and then the web or portions of it are subjected to a temperature treatment to make the web electrically conducting by carbonizing/graphitizing the web through heating.

WO 03/104556 A2